


Application of Corrosion Block to INTELLIKEY™ Cylinders

All INTELLIKEY™ cylinders should be periodically treated with Corrosion Block (INTELLIKEY™ part number 100795) to resist corrosion of the electrical contacts and prevent excessive wear to the core of the cylinder.

Cylinders mounted on external doors, or with more than 100 transactions per day, should be treated once a month whilst all other cylinders should be treated at least every six months.

Failure to use Corrosion Block, particularly in certain adverse environments, could result in corrosion or wear leading to invalidation of the INTELLIKEY™ warranty on the cylinder concerned. Use of non-approved lubricants (e.g. WD40) could also lead to invalidation if a failure occurs due to their use. Use of any graphite based lubricant will invalidate the warranty and could damage the INTELLIKEY™ cylinder and Controller.

Corrosion Block should be applied into the keyhole of the cylinder (one to two squirts) with particular attention being paid to the electrical contact within (cf. diagram). Following application an INTELLIKEY™ key should be inserted and the cylinder core rotated several times to distribute the lubricant fully.

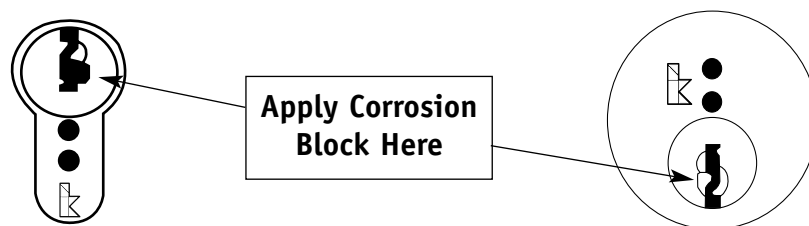

Corbin Russwin Architectural Hardware • 1902 Airport Road • Monroe, NC 28110 • tel 800.543.3658 • fax 800.447.6714

Corbin Russwin and Design® is a registered trademark of Corbin Russwin Inc. Intellikey™ is a trademark of Intellikey Corporation. These materials are protected under US copyright laws. All contents current at time of publication. Corbin Russwin, Inc. reserves the right to change availability of any item in this technical bulletin, its design, construction, and/or its materials.